

PRESS SCREWS

42721-739

42721 - 9"
42739 - 12"

FEATURES:

- threaded nut drives
- screws: cold drawn steel, 11/16" dia. with deep, smoothly cut threads
- castings: best grade malleable iron, black baked enamel finish
- swivel face: 1-3/8" x 1-5/8"
- removable swivel permits easy installation for any job-design changeovers


APPLICATION:

For making up veneer-press frames, or portable or stationary jigs for all types of gluing, welding or other assembly operations.

SPECIFICATIONS:

INSTALLATION:

1. Bore 1" diameter hole through frame member.
2. Drive threaded nut casting, into hole from underside of frame member.
3. Secure threaded nut flange to frame using flat head wood screws.
4. Thread press screw into nut from topside of frame.
5. Resecure swivel face to screw.

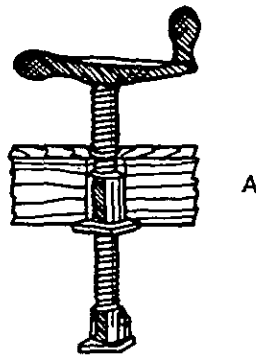

- #42721 has a 9" long screw
#42739 has a 12" long screw

