

# Aluminum Router Lift FX

Model #23194



Thank you for choosing this product from Rockler. We appreciate your support and hope that our product serves you well. This product is designed to provide many years of reliable service provided it is used as intended and taken care of.

This user manual will assist you in assembly and general operation of this product. It is not our intent to teach you about woodworking. It is assumed that you are an experienced woodworker with the basic skills and experience necessary to use this product safely. After reading the following instructions, if you are unsure or uncomfortable about safely using this product we urge you to seek additional information through widely available woodworking books or classes.



Create with Confidence™

4365 Willow Dr  
Medina, MN 55340

Call: 1-800-279-4441

Online: [www.rockler.com](http://www.rockler.com)

## IMPORTANT!

Read and understand the contents of this manual before assembly or operation of this product.

## Suggested Router Bit Speeds

Bit Diameter	Max. Speed
1" (25mm)	24,000 RPM
1-1/4" - 2" (30-50mm)	18,000 RPM
2-1/4" - 2-1/2" (55-65mm)	16,000 RPM
3" - 3-1/2" (75-90mm)	12,000 RPM

As part of our Continuous Product Improvement Policy, Rockler products are always advancing in design and function. Therefore there may be differences between what is shown in our catalogs, website or at retail display and what is sold at time of purchase. We reserve the right to make positive changes to our products at our discretion.

**Fits Porter Cable 690, 890 series,  
Bosch 1617, 1618 series,  
DeWalt 610, 616, 618 series \***

*\* Dewalt routers may require installation of the included shim to fit correctly. See **DeWalt Shim Instructions** for details.*

RTD10000606AD


## IMPORTANT SAFETY PRECAUTIONS

- Before operating any router read and understand all safety instructions in the owner's manual that came with the router.
- If you do not have a manual, contact the manufacturer and obtain one before using any power tool.
- Always wear eye protection in compliance with ANSI safety standards when operating any power tool.
- Always use proper guards and safety devices when operating power tools and machinery.
- Carefully check router bits before each use. Do not use if damage or defect is suspected.
- Do not exceed the recommended RPM for any router bit.
- Do not wear loose clothing or jewelry that may catch on tools or equipment.
- Unplug the tool or machine when mounting or making any adjustments to mechanical performance.

**DO NOT USE A CORDLESS DRILL TO RAISE AND LOWER THE LIFT CARRIAGE. THE AMOUNT OF FRICTION WILL CAUSE PREMATURE WEAR OF THE THREADS**

## ROUTER SAFETY PRECAUTIONS

- Never force the bit or overload the router beyond the expectations of the tool.
- Be sure that at least 3/4 of the shank length is inserted securely in the router collet.
- Never bottom out the bit in the collet. Allow 1/8" clearance between shank and bottom of collet.
- Always make sure the fence on your router table is locked into position before each use.
- Always rout in two or more passes when large amounts of stock must be removed.
- Use reduced RPM speeds for large diameter bits.

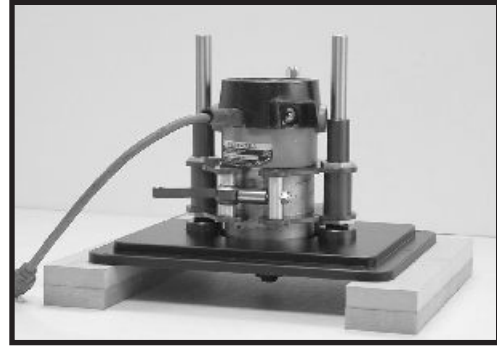

**Fig. 1**

## INSTALLING THE ROUTER

1. Place the crank handle into the hex hole in the lift's dial on the top plate. Crank the lift carriage up so that it just contacts the O-rings at top of the carriage shafts. The carriage should be all the way toward the top plate.
2. Before installing the router motor, prop the unit up on blocks of wood (Fig. 1) so the router's collet can extend through the centerhole in the top plate. The motor housing must slide all the way through and contact the inside back of the centerhole on the plate.
- 3A. Open the cam lock clamp to accept the router motor and slide the motor into the carriage so the top of the motor housing just makes contact with the inside surface of the centerhole in the top plate. Then back it off approx. 1/16".  
**Note:** If the cam lock clamp does not secure the router motor properly, or is too tight, you may have to adjust the clamp tension see step 3B.



**CLAMP OPEN**  
The cam lock design spreads the clamp when fully opened.

**CLAMP CLOSED**  
Secures the router motor in the carriage when fully closed.



## ADJUSTING THE CAM LOCK CLAMP

**3B.** The tolerances on many router motor Housing diameters vary slightly. If the clamp does not appear to hold the router motor securely, or if you are unable to close the clamp entirely because it is too tight, you may have to adjust the tension on the cam lock clamp. Using 1/2" wrench, turn the lock nut counter-clockwise to loosen the clamp or clockwise to tighten (Fig. 2). A small adjustment is all that is needed. Test and repeat in small increments until a correct fit is achieved. The cam lever should be closed completely with the router motor secure.

Your Rockler Router Lift FX comes with one insert ring with a pre-drilled 1½" diameter center hole. Additional rings are available with different diameter pre-drilled holes and/or no pre-drilled holes for creating your own custom centerhole diameters.



**Fig. 2**

**4.** Rotate the motor so that the on/off switch and variable speed adjustment switches are in your most desired position relative to being able to access them from the front, side or rear of the router table, whichever you prefer. Close the cam lock clamp to secure the motor in the carriage. The lift is now ready to be placed in a router table.

## INSTALLING A ROCKLER ROUTER LIFT FX IN A CUSTOM ROUTER TABLE APPLICATION

Using a Rockler Router Lift FX in a router table is similar to using a router mounting plate. Your table top must have a port machined into the top. If you are installing this Lift in a custom table application you will have to fabricate this opening yourself. Rockler offers a separate template (#20956) for this operation.

## USING YOUR ROCKLER ROUTER LIFT FX

To raise your router, turn the height adjustment handle clockwise. To lower, turn the handle counter-clockwise. Keep in mind that one complete revolution equals 1/16" of change. When your adjustment is complete, remove the handle and place somewhere off the work surface for safety. Refer to the chart below for fractional and decimal adjustments based on amount of revolutions made.

Fraction	Decimal	Number of Revolutions
1/64"	0.016"	1/4 Revolution
1/32"	0.031"	1/2 Revolution
1/16"	0.062"	1 Revolution
1/8"	0.125"	2 Revolutions
1/4"	0.250"	4 Revolutions
1/2"	0.500"	8 Revolutions

## RE-ADJUSTING THE THREAD TENSIONING

The Rockler Router Lift FX features our patented thread tensioning design. This feature is why it is not necessary to lock the router into position after setting the cutting height. The design keeps tension on the position wherever you set the height. Thread tension is set at the factory and depending on the amount of use you may have to reset this adjustment periodically. If the bit height ever begins to change (or drop) during use, the thread tensioning likely needs to be reset.

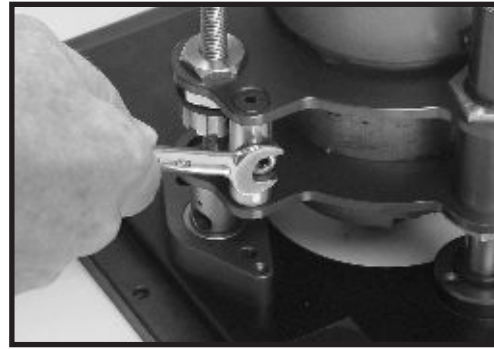


Fig. 4

## INSTALLING THE ROUTER

1. Turn the Lift upside down on a table with the threaded height adjustment rod facing you.
2. With a 7/16" open end wrench, (Fig. 5) loosen the 1/4" - 20 hex nut that is located on the right side of the brass post next to the threaded rod. Then use a hex wrench to back out the set screw that threads through the nut until the brass tensioning collar can be turned.
3. Then rotate the brass tensioning collar (Fig. 6) with vertical grooves, so it tightens against the rubber washer. Note: a drop of oil on the rubber washer eases the rotation of the brass collar.
4. Be certain when you tighten the brass collar the set screw seats in one of the vertical grooves.
5. Tighten the 1/4-20 nut with the 7/16" wrench again and the adjustment is complete.



Fig. 5