



Back Legs
(Front and Side Views)

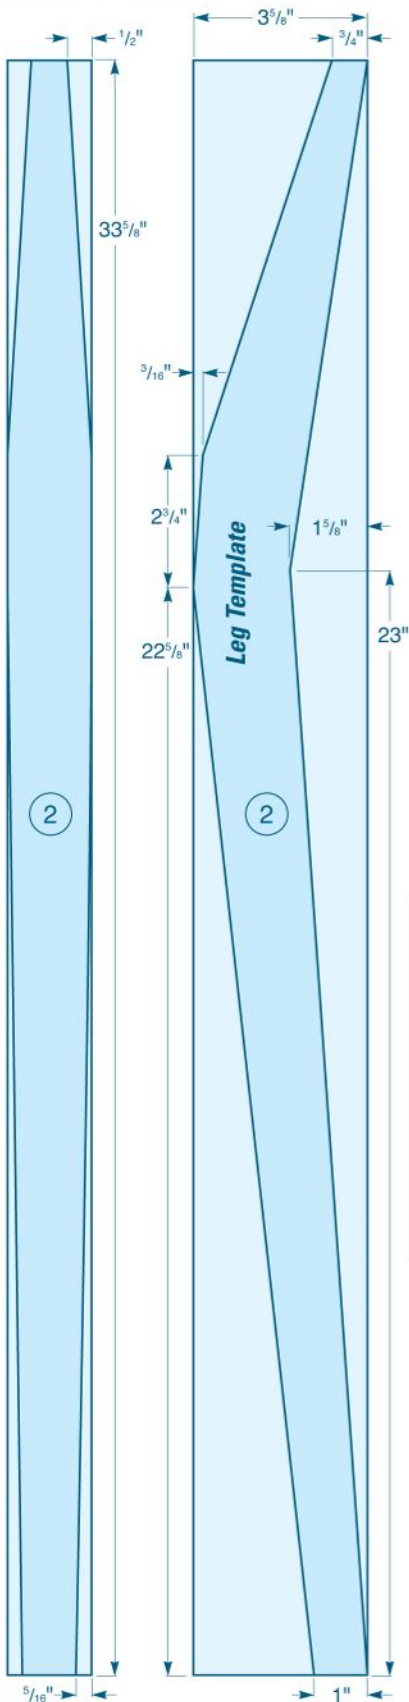

NOTE: To locate the notches on the back legs, clamp the front legs to the seat and hold the subassembly in position on the floor with the seat level. Next, place a back leg in position and transfer the marks for the leg notches. Do this with each leg. This task is most easily done with two people.

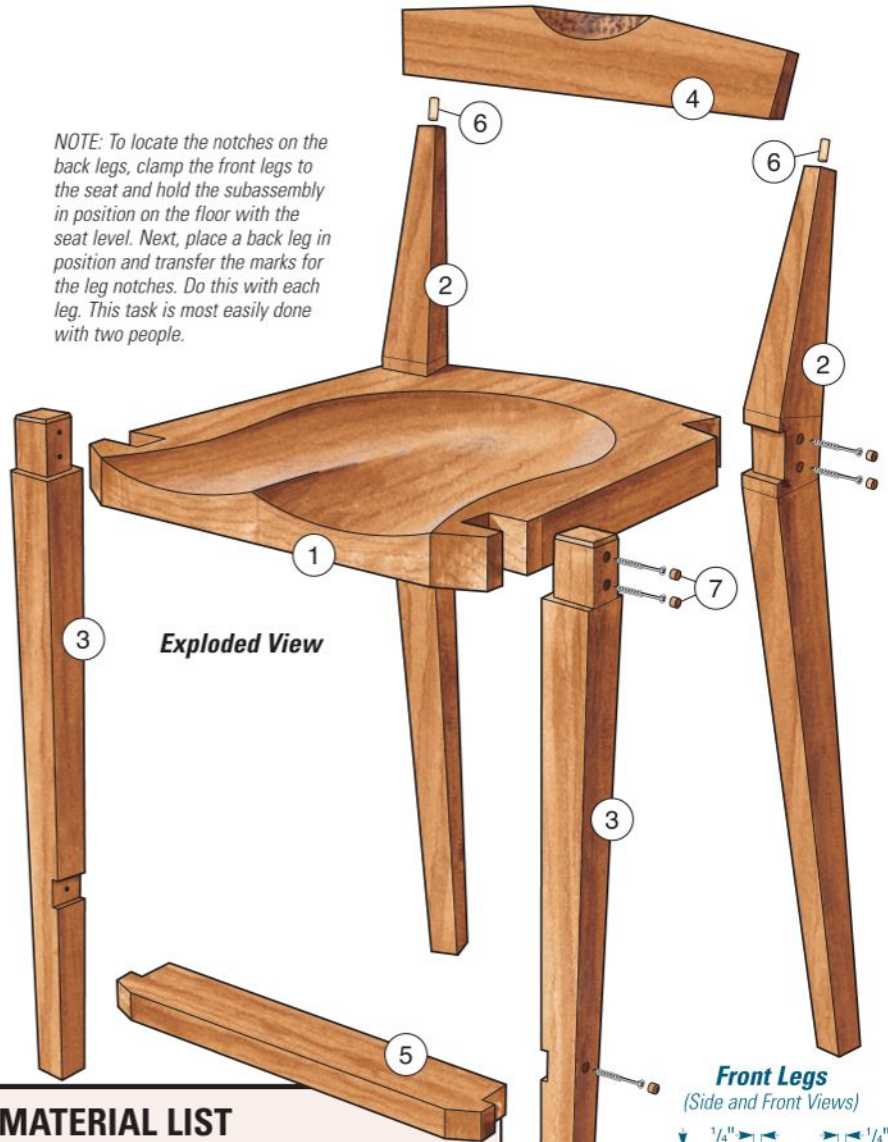


Exploded View

MATERIAL LIST


	T x W x L
1 Seat (1)	1 3/4" x 16 1/2" x 18"
2 Rear Legs (2)	1 3/4" x 3 5/8" x 33 5/8"
3 Front Legs (2)	1 3/4" x 1 3/4" x 24 3/4"
4 Crest Rail (1)	1" x 2 7/8" x 16"
5 Footrest (1)	1" x 2 1/2" x 15"
6 Small Dowels (2)	1/4" D. x 1"
7 Screw Plugs (10)	Shop-made

Front Legs
(Side and Front Views)

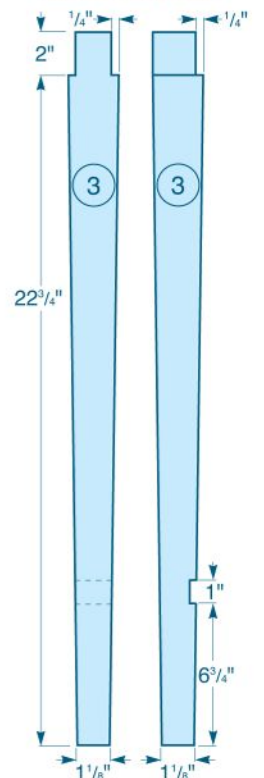

Crest Rail

(Top and Front Views)

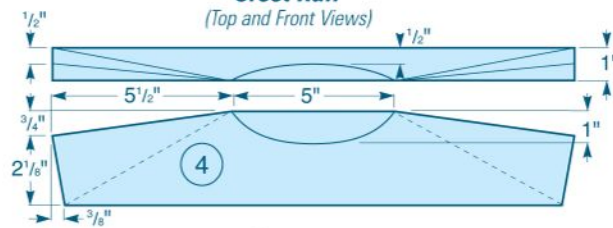

Footrest

(Top View)

